



12FS-120 FS Series

Rolls 12V 120Ah (C20) Deep Cycle Battery




RESERVE CAPACITY	CCA	
	@25AMPS	CCA@-18°C
235 Mins.	572	457

SPECIFICATIONS		
Nominal Voltage		12 Volt
Rated Capacity (20 hour rate)		120Ah
Dimensions	Height	238mm
	Length	330mm
	Width	171mm
Weight (Dry)		28 Kg
Weight (Wet)		35 Kg

PLATES		
Cells		6
Plates/Cell		12
Positive Plate Dimension	Height	140mm
	Width	143mm
	Thickness	3.43mm
Negative Plate Dimension	Height	140mm
	Width	143mm
	Thickness	2.24mm
Separator Thickness		1mm
Insulation Glass Mat		1mm

CHARACTERISTICS		
Capacity 77°F (25°C)	20 Hour Rate	120 Ah
	10 Hour Rate	109 Ah
	5 Hour Rate	95 Ah
Current (Amps)	20 Hour Rate	6.3
	10 Hour Rate	10.9
	5 Hour Rate	19
Electrolyte Reserve Above Plates	38 mm	

CONTAINER CONSTRUCTION	
Container	Polypropylene
Cover	Polypropylene Sealed To Container
Terminals	Universal Or Flag If Specified
Handles	Plastic Mounted To Cover

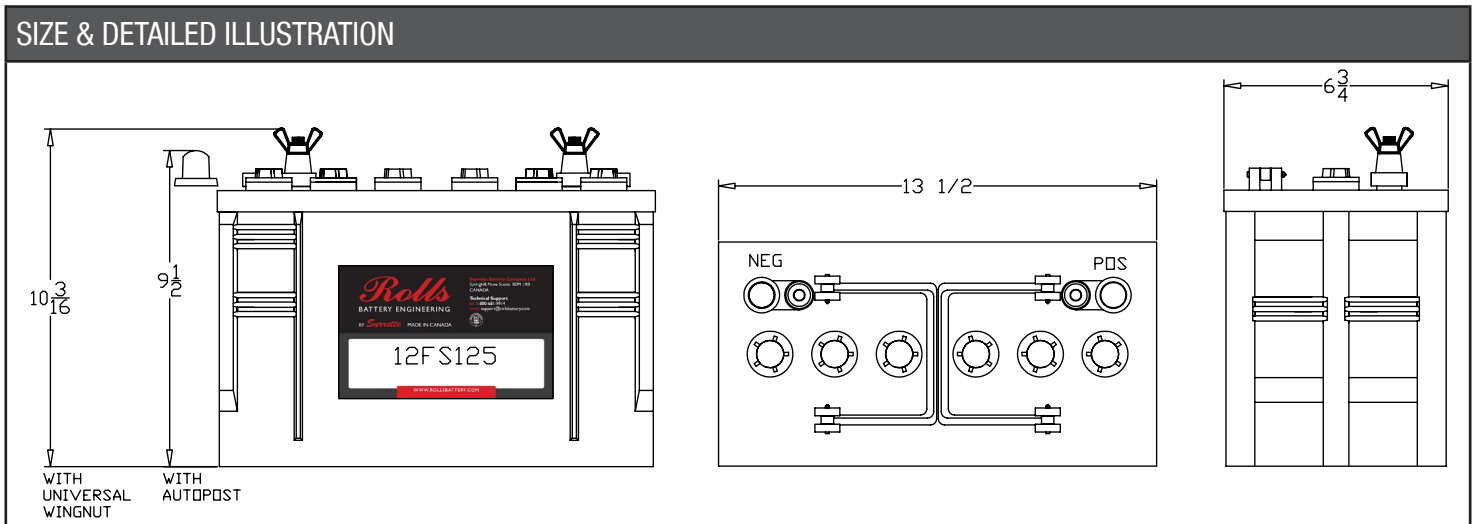

This information is generally descriptive only and is not intended to make or imply and representation, guarantee or warranty with respect to any cells and batteries. Call and battery design/specifications are subject to modifications without notice. For further information contact Rolls Battery Europe.

